

# Total Hydrocarbon Analyser FID

**19" Rack Flame-Ionisation-Detector  
iFiD Rack for continuous monitoring**

**Certification according to EN 15267-3  
and MCerts**



## iFiD Rack

### Description

The stationary Flame-Ionisation-Detector (FID) *iFiD RACK* is designed for stack monitoring, process control and also for VOC measurement. The whole gaspath is heated to 300°C and so we can speak from a Hightemperature-FID.


### Special Advantages

- User-friendly Touchpanel 7" TFT
- Single Range – no switch between ranges
- Graphic Display of HC-concentration
- Heated integrated Samplegasfilter 300°C
- Internal Datalogging by USB Stick
- Built in Zerogasgenerator (option)
- Injectorversion available

### Applications

- Emission monitoring
- Indoor VOC control
- Waste plants and process control
- Automotive applications

### Operation principle

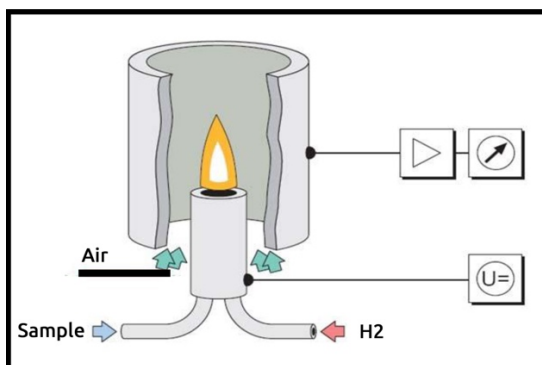

### System Performance

Measuring component:  $C_xH_y$   
 Operation: 7" TFT – Touch  
 Display: ppmC<sub>3</sub> or ppm C<sub>1</sub>  
 Measuring range: mgC/m<sup>3</sup>  
 0-10.000 mgC/m<sup>3</sup>

Repeatability: ± 1 % of Range  
 Zero drift: ± 1 % in 24 h  
 Response time: 1 Sec. (T<sub>90</sub>)  
 Warm-up time: 15 minutes

Analogue Output: 0-20mA ; 0-10V  
 Digital Output: Ethernet - RS232  
 Datastorage: USB Stick  
 Remote control: VNC; over tablet

### Gas Requirements:

- Fuel: H<sub>2</sub> 5.0 or He/H<sub>2</sub>
- Span gas: C<sub>3</sub>H<sub>8</sub>
- Zero gas: N<sub>2</sub> or synthetic air
- Combustion air: over built in cat

Fuel consumption: 30 ml/min  
 Zero / Spangas: 1 l/min

Flowcontrol: integrated  
 Pressure Compensation: -150hPa +500hPa

Power supply: 100 V ... 240 V  
 Frequency: 50 Hz.... 60 Hz  
 Power consumption: 350 W

Ambient temperature: 0°C ... +45°C  
 Protection class: IP40  
 Dimensions (H x W x D): 133x482x420 mm

Weight: 15 kg